




**9500  
SERIES**

# 9500 SERIES

## Heavy-Duty Commercial Grade 1 Architectural Rim Exit Device

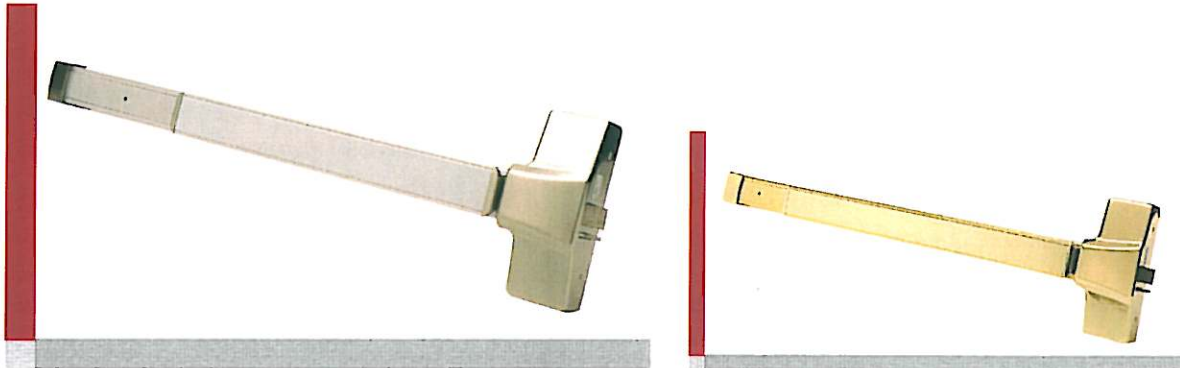

### Standard Features

- **Certification** ANSI A156.3, 2001, Grade 1, UL Listed
- **Rail** Fits 30" to 36" doors
- **Latch** Stainless steel  $\frac{3}{4}$ " throw with deadlatch feature
- **Backset** 2-3/4"
- **Strikes** Adjustable with slotted holes for adjustments
- **Fasteners** Accommodates wood and metal doors with thru bolts standard
- **Door Range** 1-3/4" to 2-1/4" thick
- **Door Preparation** Surface mounted and covers 161 prep
- **Warranty** 10 years

### Optional Features

- **Fire Rated** Fire Rated device available for use on doors rated up to 3 hours. Fire Rated device also available for larger doors up to a maximum of 4' x 8'. Specify when ordering.
- **Wide Rail** Fits up to 48" doors
- **Strike** Overlapping strike for double doors
- **Trim** Lever trim. (Prep for keyed cylinder).
- **Cylinder\*** Schlage (SCC) C, Schlage C (SC5) 5-pin, Schlage E (SCE), Arrow A (ARA), Corbin 60 (C06), Corbin 59A1 (C059A1), Corbin Russwin L4 (CL4), Russwin D1 (RD1), Sargent LA (SAL), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

\* All cylinders 6-pin except Schlage C (SC5) - 5-pin.

[11/6/07]