




LC
1200

LC1200 SERIES

Heavy-Duty Commercial Grade 1 Leversets

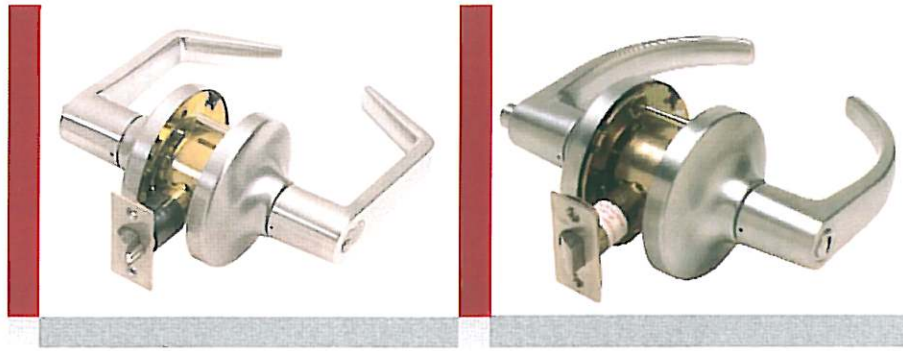

Cortland (CTL)

Buckingham (BUC)

Standard Features:

- **Certification** ANSI A156.2, Series 4000, Grade 1, (800,000 cycles), UL listed for 3 hour fire door
ANSI A117.1 American Disabilities Act (ADA)
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance), freewheeling clutch (added security from hammer attacks), independent spring cages
- **Lever** Non-handed, solid cast
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Backset** 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI ASA Strike
- **Door Range** 1-3/8" - 2"
- **Door Preparation** 2-1/8" diameter for lever, 1" diameter for latchbolt. Fits standard 161 door prep with through-bolting through the door.
- **IC Keyway Cylinder** Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
- **Cylinder*** Schlage (SCC), Schlage C (SC5) 5-pin, Schlage E (SCE), Arrow A (ARA), Corbin 60 (C06), Corbin 59A1 (C059A1), Corbin Russwin L4 (CL4), Russwin D1 (RD1), Sargent LA (SAL), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keys** Two nickel silver per lock cylinder
- **Warranty** 5 year limited

Optional Features

- **Strike** T Strike (1-1/8" x 2-3/4"), and F Strike (full lip)
- **Cylinder** Other manufacturers including small format interchangeable cores
- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

* All cylinders 6-pin except Schlage C (SC5) - 5-pin.